
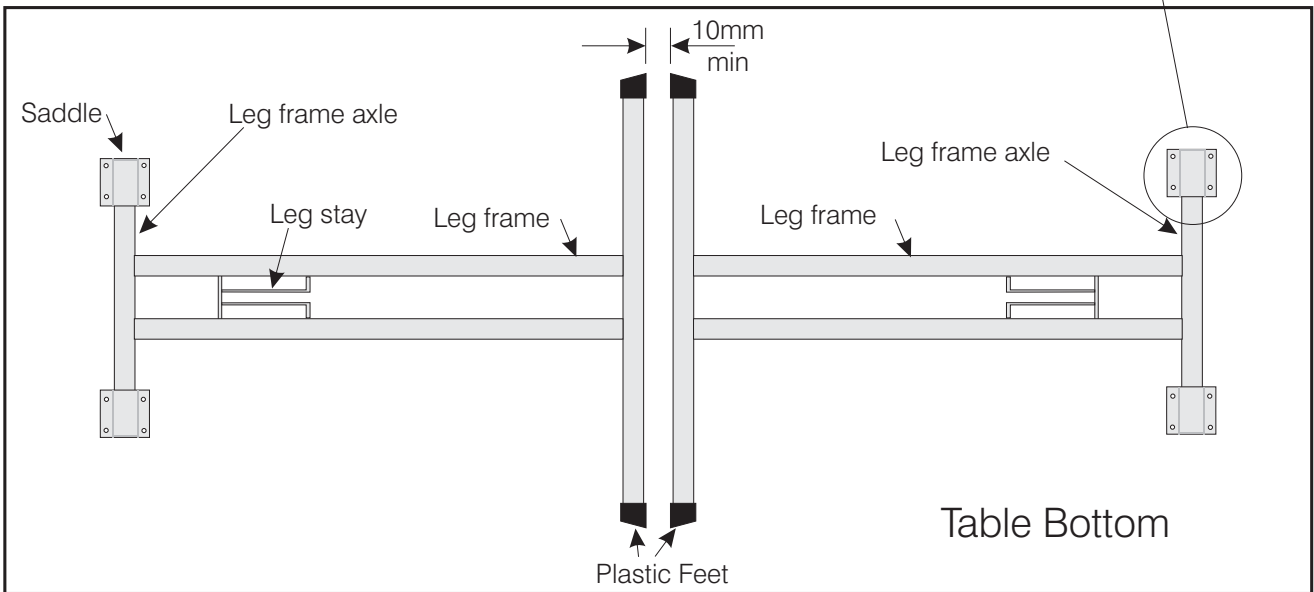


# Folding Table Legs

## Fitting Instructions


- 1 Lay leg frames flat on bottom of table top.
- 2 Position leg frames centrally, leaving a minimum of 10mm clearance between plastic feet.
- 3 Locate saddles over the end of leg frame axle, placing the closed side to the outside, making sure that the inside of the solid end is against the end of the axle.



- 4 Drill 3mm (1/8") dia holes in top to match holes in saddles, being careful not to drill through table top. Use of a drill depth gauge is recommended.

- 5 Screw saddles in place using 19mm x 10g pan head screws - long screws.

- 6 Swing leg frame to vertical position and release the leg stay from between frame members.

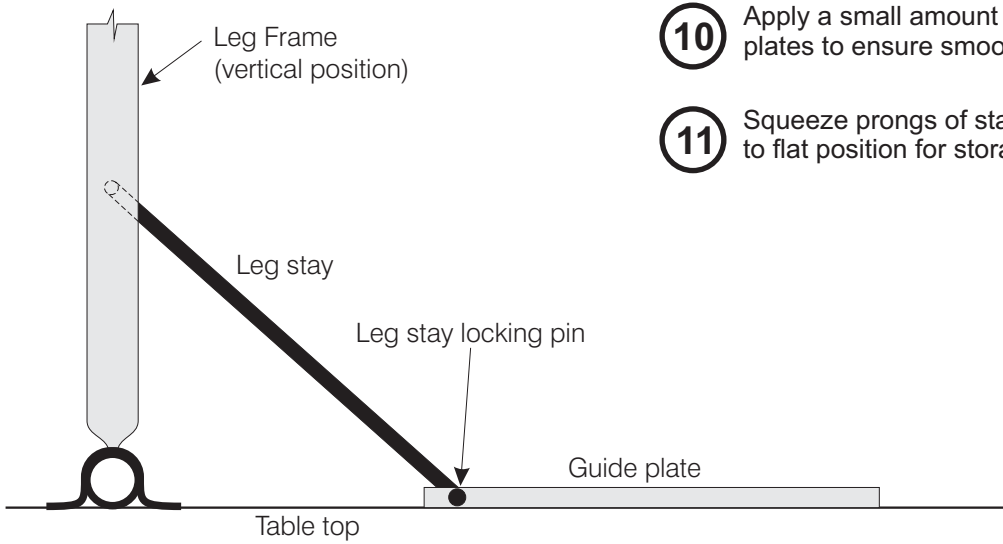

- 7 Lay guide plate flat on table top. Locate leg stay locking pins in holes in guide plate (see diagram below). Ensure leg frame is in vertical position.

- 8 Drill holes in top to match holes in guide plate. Screw guide plate into position using 16mm x 10g pan head screws - short screws.

- 9 Repeat steps 6 to 8 with other leg.

- 10 Apply a small amount of petroleum jelly to guide plates to ensure smooth operation.

- 11 Squeeze prongs of stays together and fold legs to flat position for storage.